

JF-IPC-HP2351L-IR2

5MP Lite Network Wheel Camera



Features

- ◆ 5MP@15fps/4MP@25fps
- ◆ HD lens:3.6mm (6mm optional)
- ◆ Support ONVIF(profile S)
- ◆ Support H.265+/H.265/H.264+/H.264 Video compressions, multi-level video quality configuration;
- ◆ Support intelligent video: Tripwire, Intrusion, Scene Change, Abandoned/Missing Object;
- ◆ Protection level is IP67;
- ◆ Supporting WEB, VMS, MYEYE platform;
- ◆ Support mobile phone monitoring (IOS, Android);

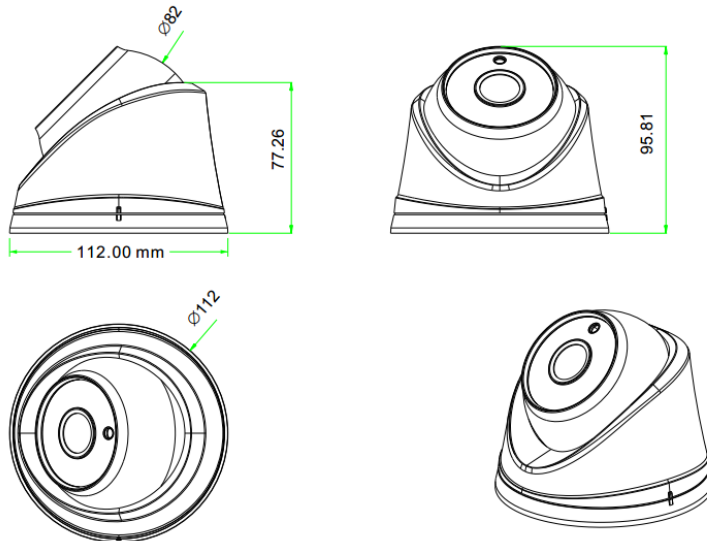
Specification

| Camera | |
|---------------------|--|
| Model | JF-IPC-HP2351L-IR2 |
| Image Sensor | 1/2.5" 5MP CMOS |
| Min.illumination | 0.01Lux@F1.2(Color)/0.001Lux@F1.2(B/W) |
| Lens | 3.6mm (6mm optional) |
| Day/Night | IR CUT |
| Wide Dynamic Range | DWDR |
| Max.IR Distance | 30m |
| Video Compression | H.265+/H.265/H.264+/H.264 |
| Multi-streaming | Dual-stream |
| Frame Rate | 5MP@15fps/4MP@25fps |
| Intelligent Video | Tripwire, Intrusion, Scene Change, Abandoned/Missing Object; |
| Compatibility | ONVIF |
| Interface | |
| Audio In/Out | 1/0 |
| Memory Slot | -- |
| Alarm In/Out | -- |
| General | |
| Ingress Protection | IP67 |
| Working Temperature | -20℃~+65℃ |
| Material | ABS plastic+Metal |
| Power | DC12V±10%,PoE |



JF-IPC-HP2351L-IR2

5MP Lite Network Wheel Camera

Dimensions



Accessories (optional)

| Bracket | Junction Box |
|---|--|
| PA-BR-W2 | PA-BO-C1 |
|  |  |

JF TECH Co.,Ltd.
Headquarters(Hangzhou):
Building 9, Yinhu Innovation Center, Hangzhou, China
Business Center(Shenzhen):
A 7th Floor, Block Sakata 5 Avenue and Chong Hing Times Tower Shenzhen
All Rights Reserved • Specifications subject to change without notice.

Website:<http://www.jftech.com>
Tel:+86-0571-23271188

Tel:+86-0755-32898088