

JF-XVI-ED2322-IR2

2MP Low Illumination Bullet XPOE Camera



Features

- ◆ 1/2.7"1080P CMOS
- ◆ Fixed lens
- ◆ Support coaxial control
- ◆ Support coaxial upgrade
- ◆ Low Illumination
- ◆ Support XVI
- ◆ XPOE Power Supply


Specification

XPOE Camera	
Model	JF-XVI-ED2322-IR2
Image Sensor	1/2.7" 1080P CMOS
Min.Illumination	0.01Lux @F1.2 (Color)
	0.001 Lux @ F1.2 (B&W)
Frame Rate	1080P@25fps
Lens	3.6mm(6mm Optional)
Day/Night	IR-CUT
Max.IR Distance	30m
OSD Menu	UTC Control
Wide Dynamic Range	DWDR
Noise Reduction	2D
Interface	
Audio In	-
Alarm In/Out	-
General	
Ingression Protection	IP67
Working Temperature	-20°~65°
material	ABS plastic +Metal
Power	XPOE Power Supply

JF-XVI-ED2322-IR2

2MP Low Illumination Bullet XPOE Camera

Dimensions

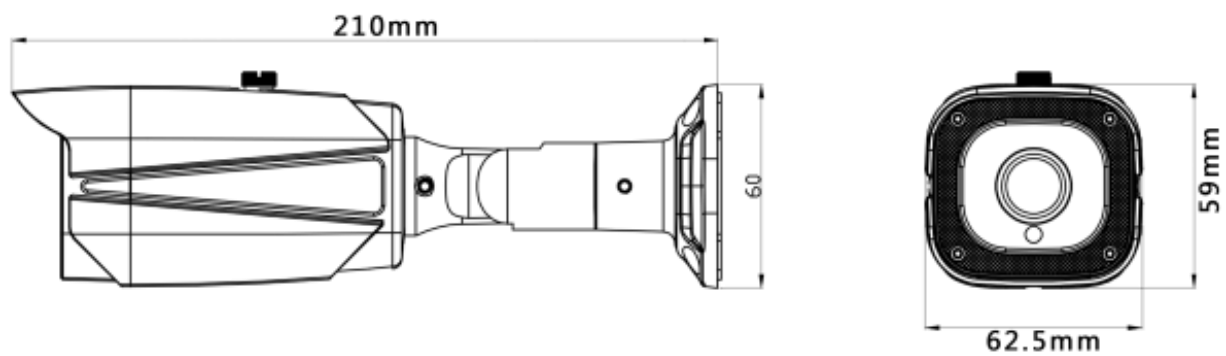

Accessories (optional)

JF TECH Co.,Ltd.
Headquarters(Hangzhou):
Building 9, Yinhu Innovation Center, Hangzhou, China
Business Center(Shenzhen):
A 7th Floor, Block Sakata 5 Avenue and Chong Hing Times Tower Shenzhen
All Rights Reserved • Specifications subject to change without notice.

Website:<http://www.jftech.com>
Tel:+86-0571-23271188

Tel:+86-0755-32898088